


## Banner Specs

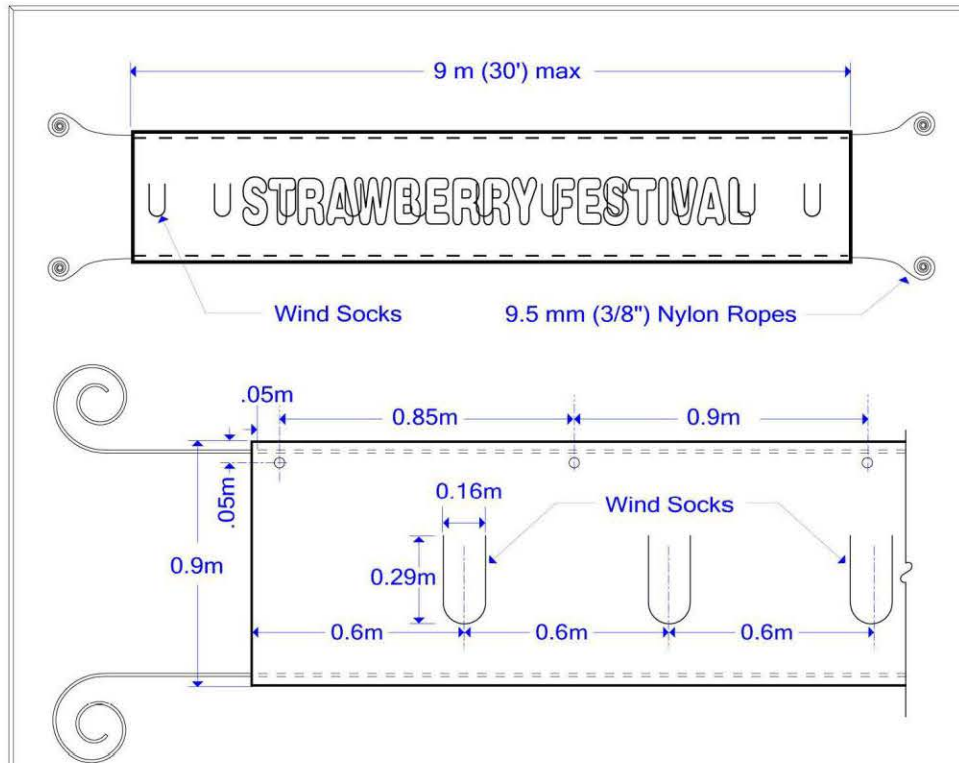

### Notes:

1. Maximum banner size: 9.0m (30ft) long by 0.9m (3ft) wide
2. Weight and type of banner material: 16 oz vinyl coated canvas or equivalent.
3. Wind socks to be centrally located between top and bottom of the banner.  
Wind socks not to be more than 0.6m (2 ft) apart.
4. #4 brass grommets (12mm or 1/2" diameter) shall be installed along the top corners of the banner.  
Grommets to be spaced at a distance of 0.9m (3ft) apart and 0.05m (2") from the edge of the banner.
5. 9.5mm (3/8") diameter nylon ropes shall be sewn into the top and bottom of banner.  
Ropes shall have a minimum of 25ft at each end.
6. Certificate of flame resistance.
7. 3 ply laminate
8. 1000 x 1000 Denier scrim
9. All edges to have reinforced webbing sewn in.

|                         |           |               |                  |
|-------------------------|-----------|---------------|------------------|
| 3                       |           |               |                  |
| 2                       |           | 02/05/06      | SJS              |
| 1                       |           | 26/3/02       | SJS              |
| No.                     | REVISIONS | DATE:         | APP'D            |
| CITY OF MARKHAM         |           |               |                  |
| ROADS DEPARTMENT        |           |               |                  |
| STREET BANNER<br>DETAIL |           |               |                  |
| SCALE: N.T.S.           |           | APPROVED:     | DATE: May 3 2006 |
| DWG: 1                  |           | CITY ENGINEER |                  |